




(https://elitefencekc.com)

(https://www.elitefence.com/locations/mo/raymore/64083/09356)

611 E. Walnut St.
Raymore, MO 64083

(tel:8162461850) Call Us Today
0) (tel:8162461850)816.246.1850
(tel:8162461850)

Or
pro
sup

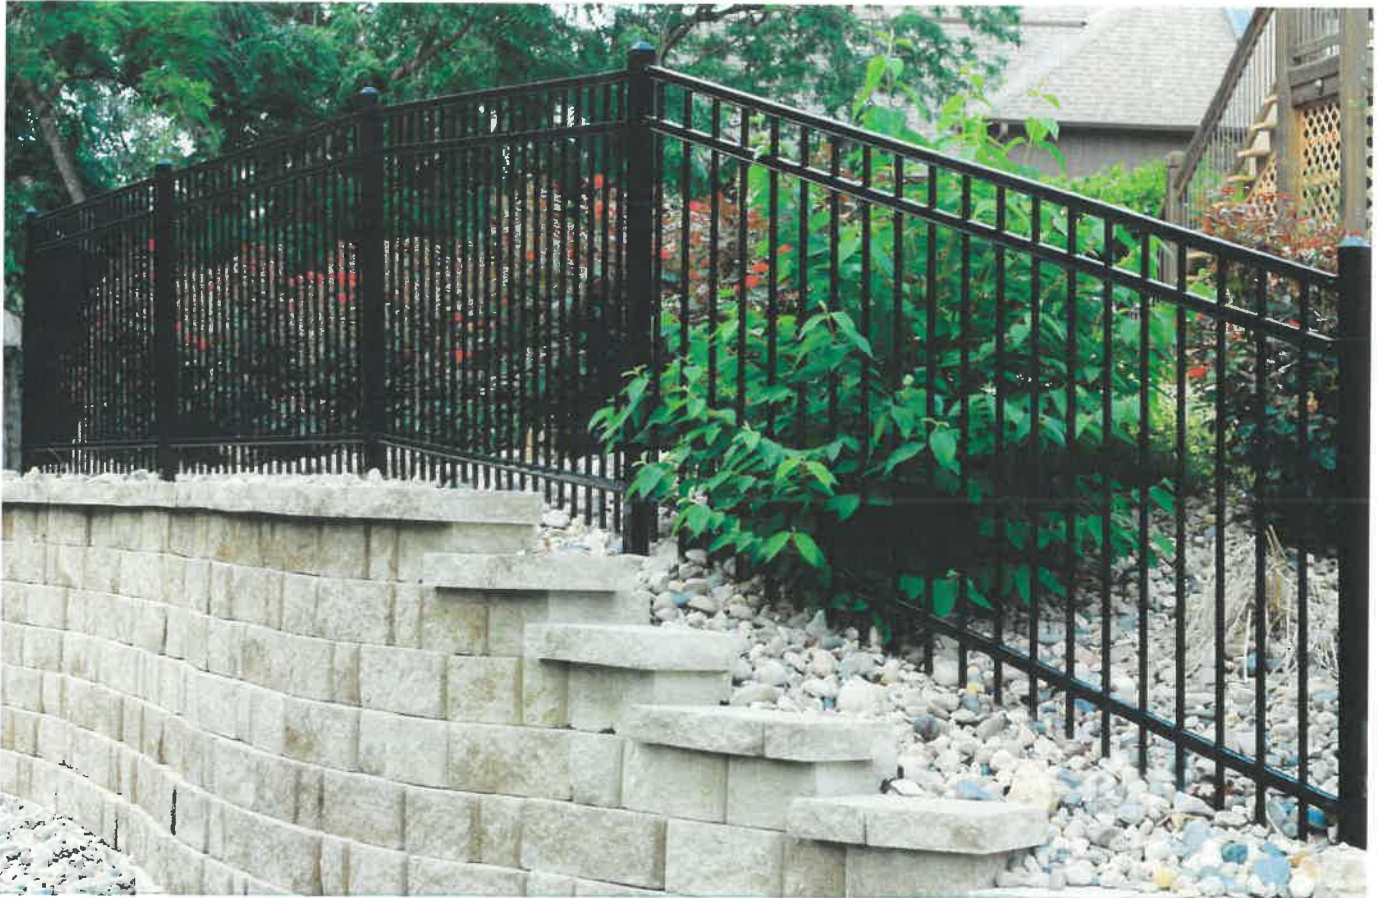

Montage Majestic - Black Iron

Get a FREE Estimate!

Receive a free quote for your fence or deck project!

First Name*

Last Name*

Email*

Phone*

Street Address*





MONOTEC 370

MONOTEC 370

SHADE FABRIC

MONOTEC 370

CANDY RED

THE STRONGEST
SHADE FABRIC ON
THE MARKET

AVAILABLE FROM:


SHADESYSTEMS

P.O. Box 62538,
Greenlane, Auckland 1546
0800 166 722
www.shadesystems.co.nz

FABRIC SPECIFICATIONS

MONOTEC 370

COLOURS	Cover Factor %	Average Transmission 290 - 770nm %	Shade Factor %	Average UVR Transmittance 290-400nm %	Average PAR Transmittance 400-700nm %	% UVR Block
Bundena Blue	86.8	16.8	83.2	14.1	17.7	85.9
Chino Cream	85.6	29.1	70.9	14.8	32.1	85.2
Karlo Sand	85.1	27.5	72.5	15.3	29.5	84.7
Graphite Grey	87.1	13.0	87.0	12.8	13.1	87.2
Marrocan Terracota	86.4	17.4	82.6	13.6	16.9	86.4
Abaroo Red	86.3	16.9	83.1	13.8	15.5	86.2
Sheba Navy	87.8	13.1	86.9	12.3	13.5	87.7
Koonunga Green	87.0	13.9	86.1	13.1	14.0	86.9
Domino Black	88.6	11.6	88.4	11.5	11.7	88.5
Lime Fizz	87.9	15.7	84.3	12.2	15.9	87.8
Sherbet Orange	85.3	20.6	79.4	14.6	20.4	85.4
Bubblagum Pink	87.0	16.4	83.6	13.1	15.6	86.9
Jazzberry Purple	86.3	15.3	84.7	13.9	15.1	86.1
Mellow Haze Yellow	83.8	25.3	74.7	15.9	26.4	84.1
NEW! Candy Red	86.4	18.5	82.8	14.2	19.6	85.8

Colours shown indicative only. Specifications for Candy Red are based on approximations only and may change

MONOTEC 370 IS IDEAL FOR:

- ✓ Shade Structures – Umbrellas
- ✓ Shade Sails – Carpark Covers
- ✓ Frame Canopies – Facades
- ✓ Truck Tarpaulins – Windbreaks
- ✓ Large Pergolas – Architectural Awnings



FEATURES



Introducing the strongest shade mesh on the market! Monotec 370 has been specifically developed for ultimate sun protection and longevity. This means your shade structure maintains its usefulness and remains looking great for years longer than those made with other fabrics. Also, as the widest shade cloth available, your Monotec 370 sail or structure is more aesthetically pleasing due to the reduction of unattractive seams.

Developed in Australia, Monotec 370 is 100% Australian owned and made. Manufactured using only the highest quality raw materials, you can be assured that the fabric is engineered to outlast other products. Monotec 370 can be used in virtually any situation where high UV protection is required. When you need top tier sun protection, look no further than Monotec 370.

- ✓ Premium grade fabric – the strongest shade mesh available
- ✓ Ideal for larger sails and structures
- ✓ Up to 90% shade offered
- ✓ 15 year warranty – best in the industry!
- ✓ Stain, dirt and grime resistant
- ✓ Extra wide fabric (6.5m) so seams in sails are kept to a minimum
- ✓ Available in 15 designer colours
- ✓ Eco-friendly - 100% recyclable

MONOTEC 370 Series is supported by a 15 Year Under Tension Warranty.



ENGINEERING SPECIFICATIONS



Breaking Force Warp (AS2002.3:1-2001)	1433N/50mm
Breaking Force Weft (AS2002.3:1-2001)	2210N/50mm
Elongation at Break Warp	97.9%
Elongation at Break Weft	73.5%
Bursting Pressure (AS 2001.2.4-16990)	4750kPa
Bursting Force (AS 2001.2.19-1988 Mean)	3011N

3-Loop Wave Style Bike Rack - 5 Bike Capacity, Black



[More Images](#)

Upscale stylish look for downtown shopping and business districts.

- For stadiums, parks and athletic fields.
- 10-gauge steel with attractive powder coating.
- 2 3/8" diameter bar.
- Mounting hardware included.

SPECIFY COLOR:

MODEL NO.	DESCRIPTION	SIZE L x W x H	BIKE CAPACITY	WT. (LBS.)	PRICE EACH		COLOR	IN STOCK SHIPS TODAY	
					1	3+			
H-2543BL	3-Loop	43 x 2 1/2 x 39"	5	56	\$395	\$375	<input checked="" type="checkbox"/> Black	1	ADD

SHIPS VIA MOTOR FREIGHT

[+ Additional Info](#) [+ Parts](#) [+ Shopping Lists](#) [Request a Catalog](#)

SAME DAY SHIPPING

HUGE SELECTION IN STOCK

SHIPS FROM 13 LOCATIONS

V2KS Equipment Screens



[Home](#) [Products](#) [How It Works](#) [Design Help](#) [Gallery](#) [Contact](#) [FAQ](#)

[Online Store](#)

2" Deep Standard Flat Blade Screen



V2KS Equipment Screen is an **inverted louver** blade vision barrier. Louver blades run horizontal with intermediate vertical supports for attachment to structural framing.

Features:

- Made to order in sizes 12" wide x 12" high up to unlimited size
- Made from heavy gauge 0.063" thickness aluminum extrusion
- 2" blade spacing
- Storm (baffle) blade
- Mitered outside corners for continuous blade appearance
- Hidden Mullion joints at section breaks (concealed from view)

Specs:

- **48.9%** free area for a 48" wide x 48" high panel
- **0.66** wind load coefficient
- **30 psf** wind load rating
- Weight: **2.55 lbs** per sq ft of louver face area

Options:

- A variety of metal finishes including paint and anodizing
- Higher wind load ratings
- Compatible with the Sturdistruct framing system

Visibility through this model equipment screen is 0% at sight line 0 degrees (horizontal) or below. The visibility through the screen increases as the sight line angle increases from horizontal (approximately 40% visibility at 45 degrees above horizontal).

Select Model Search

Standard Mount to Framing

Kynar 500® or Hylar5000® and Baked Enamel Standard Colors



Bone White



Heirloom White



Patina Green



Sandstone



Beige



Hartford Green



Rawhide



Dove Gray



Redwood



Buckskin



Slate Gray



Black



Sienna



Medium Bronze



Dark Bronze

The colors shown here are only a sample of thousands of colors available. Contact us for information regarding custom color matching.

TYPE OF FINISH	FINISH SPECIFICATIONS
-----------------------	------------------------------



WEDGE3 LED

Architectural Wall Sconce



Catalog Number


Notes

Type

Fill in the LED Key or Model table the edge to view all alternative elements.

Specifications

- Depth (D1):** 8"
- Depth (D2):** 1.5"
- Height:** 9"
- Width:** 18"
- Weight:** 19.5 lbs (without options)

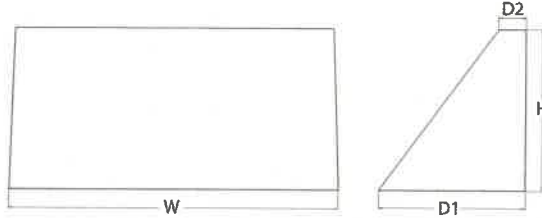

Introduction

The WEDGE LED family is designed to meet specifier's every wall-mounted lighting need in a widely accepted shape that blends with any architecture. The clean rectilinear design comes in four sizes with lumen packages ranging from 1,200 to 25,000 lumens, providing a true site-wide solution. Embedded with nLight® AIR wireless controls, the WEDGE family provides additional energy savings and code compliance.

WEDGE3 has been designed to deliver up to 12,000 lumens through a precision refractive lens with wide distribution, perfect for augmenting the lighting from pole mounted luminaires.



Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit www.acuitybrands.com/designselect. *See ordering tree for details

WEDGE LED Family Overview

Luminaire	Optics	Standard EM, 0°C	Cold EM, -20°C	Sensor	Approximate Lumens (4000K, 80CRI)						
					P0	P1	P2	P3	P4	P5	P6
WEDGE1 LED	Visual Comfort	4W		--	750	1,200	2,000	--	--	--	--
WEDGE2 LED	Visual Comfort	10W	18W	Standalone / nLight	--	1,200	2,000	3,000	4,500	6,000	--
WEDGE2 LED	Precision Refractive	10W	18W	Standalone / nLight	700	1,200	2,000	3,200	4,200	--	--
WEDGE3 LED	Precision Refractive	15W	18W	Standalone / nLight	6,000	7,500	8,500	10,000	12,000	--	--
WEDGE4 LED	Precision Refractive			Standalone / nLight	--	12,000	16,000	18,000	20,000	22,000	25,000

Ordering Information

EXAMPLE: WEDGE3 LED P3 40K 70CRI R3 MVOLT SRM DDBXD

Series	Package	Color Temperature	CRI	Distribution	Voltage	Mounting	
WEDGE3 LED	P0	30K 3000K	70CRI	R2 Type 2	MVOLT	Shipped included SRM Surface mounting bracket ICW Indirect Canopy/Ceiling Washer bracket (dry/damp locations only) ²	
	P1	40K 4000K	80CRI	R3 Type 3	347 ¹		Shipped separately AWS 3/8 inch Architectural wall spacer ³
	P2	50K 5000K		R4 Type 4	480 ¹		PBBW Surface-mounted back box (top, left, right conduit entry). Use when there is no junction box available. ³
	P3			RFT Forward Throw			
	P4						

Options

Options	Finish
E15WH Emergency battery backup, Certified in CA Title 20 MAEDBS (15W, 5°C min) E20WC Emergency battery backup, Certified in CA Title 20 MAEDBS (18W, -20°C min) PE Photocell, Button Type ⁴ DMG 0-10V dimming wires pulled outside fixture (for use with an external control, ordered separately) ⁵ BCE Bottom conduit entry for back box (PBBW). Total of 4 entry points. SPD10KV 10kV Surge pack ⁶ CCE Coastal Construction ³	DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DSSXD Sandstone DBBTXD Textured dark bronze DBLBXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white DSSTXD Textured sandstone
Standalone Sensors/Controls PIR Bi-level (100/35%) motion sensor for 8-15' mounting heights. Intended for use on switched circuits with external dusk to dawn switching. PIRH Bi-level (100/35%) motion sensor for 15-30' mounting heights. Intended for use on switched circuits with external dusk to dawn switching PIR1FC3V Bi-level (100/35%) motion sensor for 8-15' mounting heights with photocell pre-programmed for dusk to dawn operation. PIRH1FC3V Bi-level (100/35%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk to dawn operation. Networked Sensors/Controls NLTAIR2 PIR Embedded wireless controls by nLight with Passive Infrared Occ sensor and on/off photocell for 8-15' mounting heights. NLTAIR2 PIRH Embedded wireless controls by nLight with Passive Infrared Occ sensor and on/off photocell for 15-30' mounting heights. NLTAIREM2 PIR Embedded wireless controls by nLight with UL924 listed emergency operation, Passive Infrared Occ sensor and on/off photocell for 8-15' mounting heights ⁷ NLTAIREM2 PIRH Embedded wireless controls by nLight with UL924 listed emergency operation, Passive Infrared Occ sensor and on/off photocell for 15-30' mounting heights See page 4 for out of box functionality	

Accessories

Ordered and shipped separately.

- WDGEAWS DDBXD WEDGE 3/8inch Architectural Wall Spacer (specify finish)
- WDGE3PBBW DDBXD U WEDGE3 surface-mounted back box (specify finish)

NOTES

- 1 347V and 480V not available with E15WH and E20WC.
- 2 Not qualified for DLC. Not available with emergency battery backup or sensors/controls
- 3 For PBBW and AWS with CCE option, require an RFA.
- 4 PE not available in 480V and with sensors/controls.
- 5 DMG option not available with sensors/controls.
- 6 Not available with E20WC option.
- 7 Available with MVOLT only and only rated to 25C ambient.



COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • www.lithonia.com
 © 2019-2024 Acuity Brands Lighting, Inc. All rights reserved.

WEDGE3 LED
Rev. 07/08/24